

BG Tools Usage Instructions



Our Company's Interpretation Shall Prevail.

Note this software is only for Bolymedia's cameras of BG500 SERIES, MG982K-12mHD, MG983G, SG880MK and MG882K. Also this software is only used for Android mobile phone, please search BGTools in your APP Store if you need an IOS one.

1 、 Install BG Tools.apk to your smart phone.




2、 Open the BG Tools app, click on the icon  add a new device.

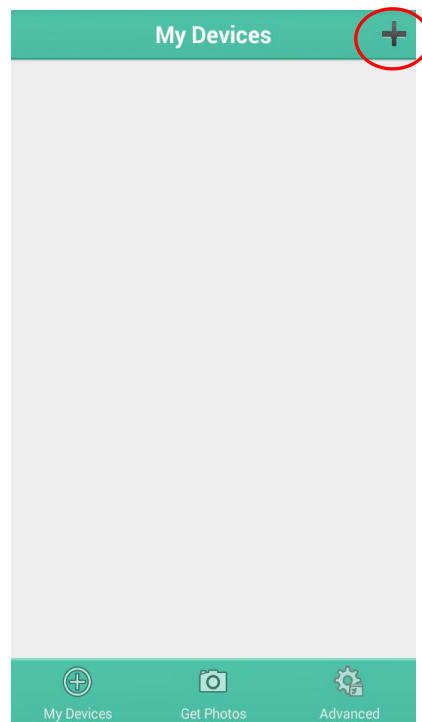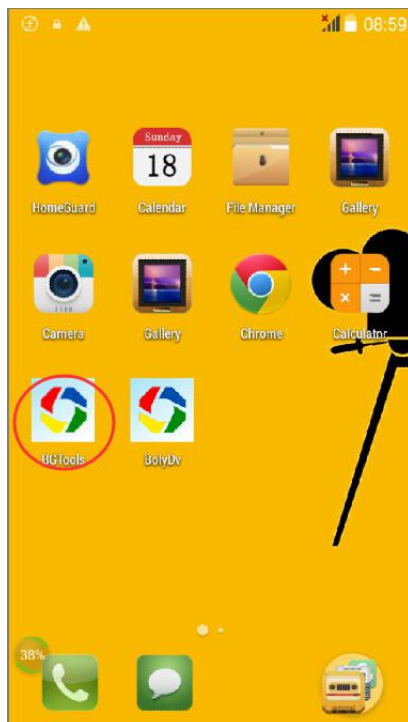


3、 Choose your camera

① Input a name for you camera ② Input your SIM card number which is inserted in your camera. ③ Choose your camera model number,then click “Add”。

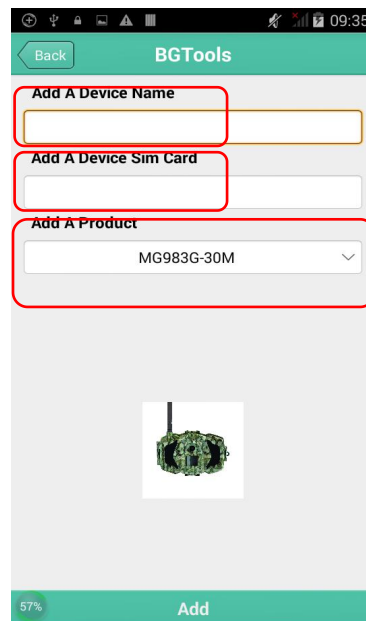


The screenshot shows the BGTools app interface. At the top, there is a green header bar with a 'Back' button and the text 'BGTools'. Below the header, there are three input fields, each with a red border: 'Add A Device Name' (a text input field), 'Add A Device Sim Card' (a text input field), and 'Add A Product' (a dropdown menu showing 'MG983G-30M'). Below these fields is a small image of a camera. At the bottom, there is a green bar with a battery icon showing 57% and an 'Add' button.

4、 Set super user number and password.For the first time use the super user password is 0518.(The Super User number is the SIM card number which is inserted in your mobile phone).

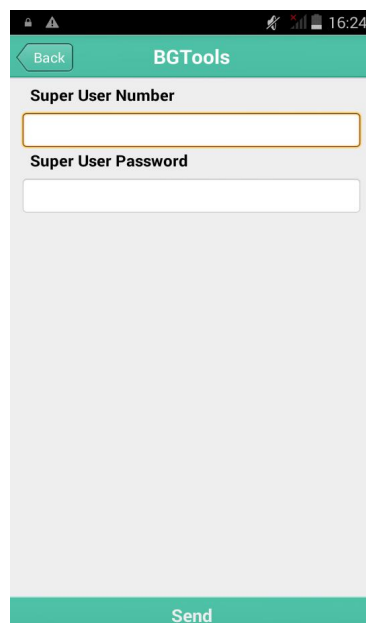


The screenshot shows the BGTools app interface for setting super user credentials. At the top, there is a green header bar with a 'Back' button and the text 'BGTools'. Below the header, there are two input fields: 'Super User Number' (a text input field) and 'Super User Password' (a text input field). At the bottom, there is a green bar with a 'Send' button.

5、 In the step 4 Click “send” ,then choose the country and provider according to your SIM card.

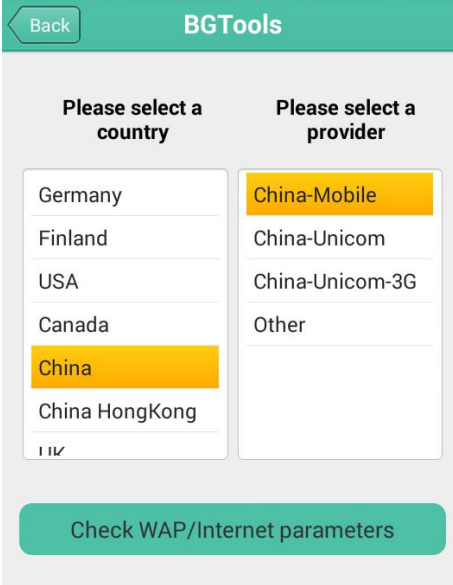


The screenshot shows the BGTools app interface. At the top, there is a green header with a 'Back' button and the title 'BGTools'. Below the header, there are two columns of selection options. The left column is titled 'Please select a country' and lists Germany, Finland, USA, Canada, China (highlighted in yellow), China HongKong, and ILV. The right column is titled 'Please select a provider' and lists China-Mobile (highlighted in yellow), China-Unicom, China-Unicom-3G, and Other. At the bottom, there is a green button labeled 'Check WAP/Internet parameters'.

6、 Click “Check WAP/Internet Parameters” to check whether you have all parameters filled in. The “User name and User Password ” is your MMS name and password.

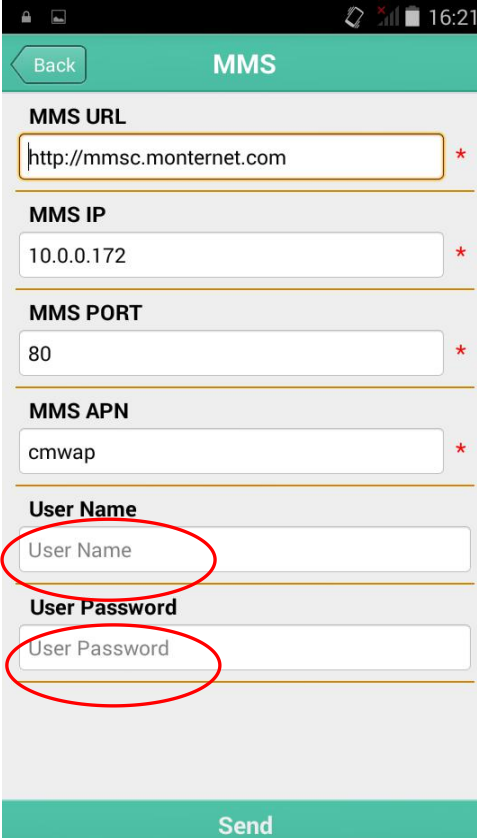


The screenshot shows the MMS configuration screen in the BGTools app. At the top, there is a green header with a 'Back' button and the title 'MMS'. Below the header, there are several input fields for MMS configuration: MMS URL (http://mmmc.monternet.com), MMS IP (10.0.0.172), MMS PORT (80), and MMS APN (cmwap). Each of these fields has a red asterisk to its right. Below these fields are two more input fields: User Name and User Password. Both of these fields are circled in red. At the bottom, there is a green button labeled 'Send'.


7、 Select Mail Server:Boly Email or Other Email.

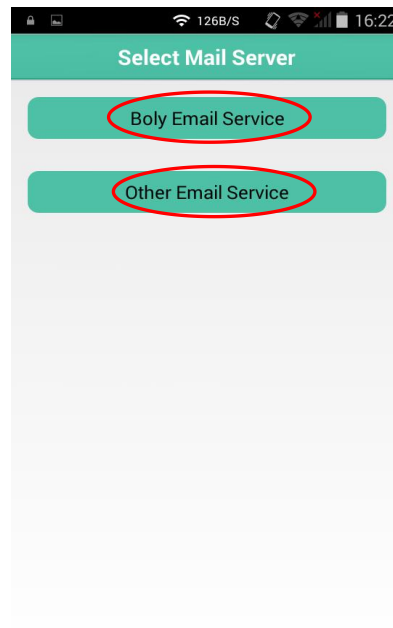


8、 Select the Boly Email Service.Input a Boly Email and “Check Gprs Parameters”. The “User name and User Password ”is your GPRS name and password.

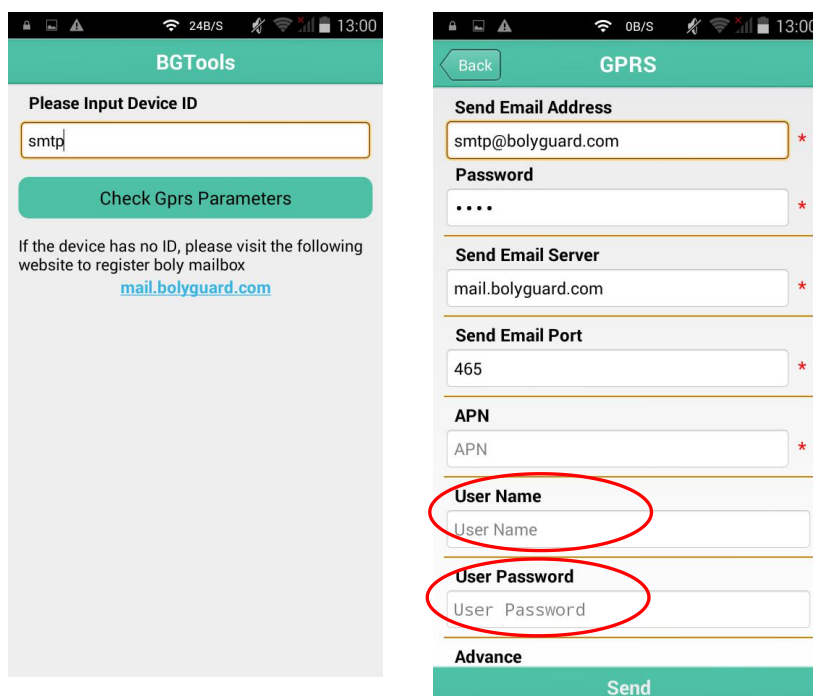

9、 Select the other Email service.You should input your Email address、 Password、 Email Server and Email Port. (If you use an SSL email such as Gmail as sending email, please click “Advanced” button to mark it.)

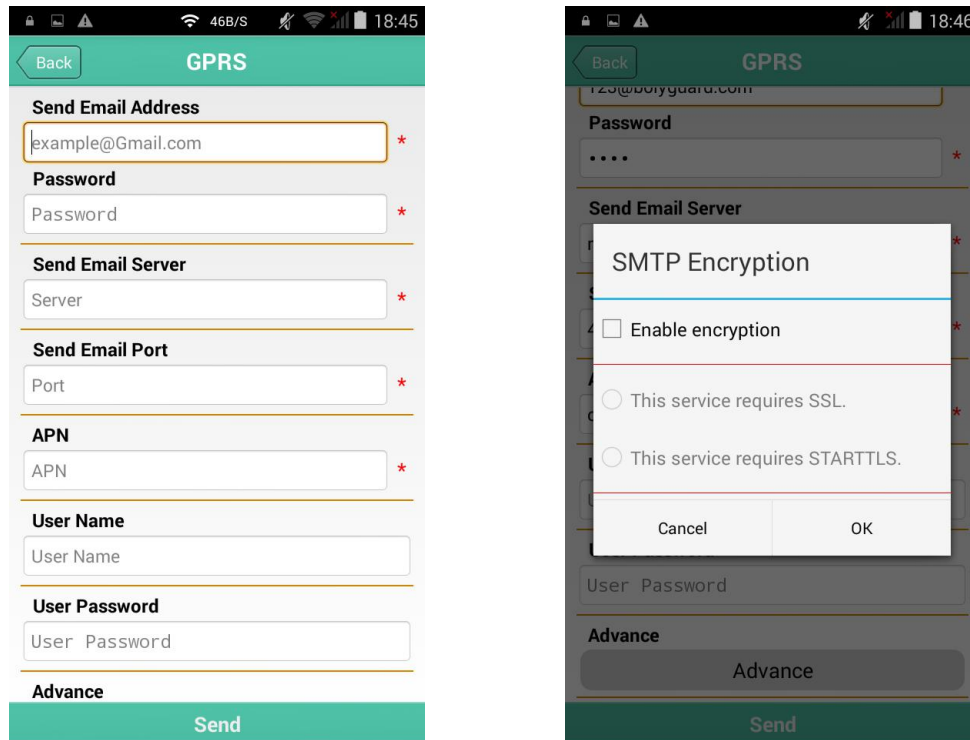

10、 Select “my device” you can add or delete a device.

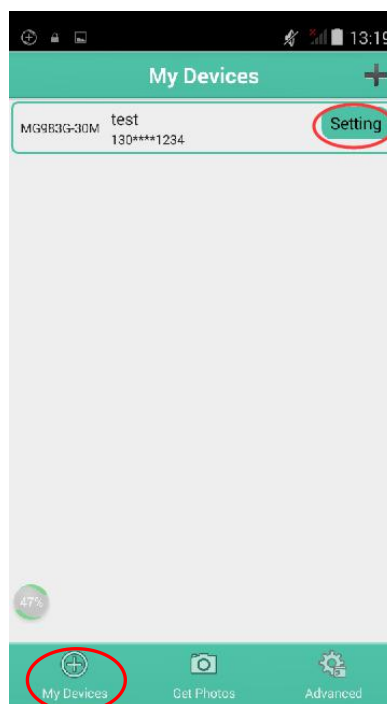

11、Select“Seting”（step 10） to set users parameters or set to default.



Set work parameters: Set the parameters contains(camera mode、photo size、video size、 photo burst、 video length 、 time lapse 、 PIR Interval、 Send to 、 Send Mode、 SMS Control、 Camera Position、 Work hour) .

Alter email server:You can change the send email and password as you want.


Alter mms parameters: You can change the MMS parameters.

Set receiving email: Input your receive email .

Set receiving phone: Input your receiving phone number.

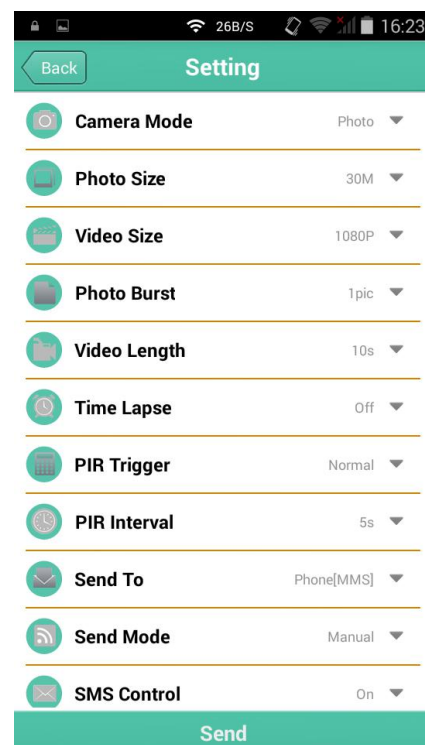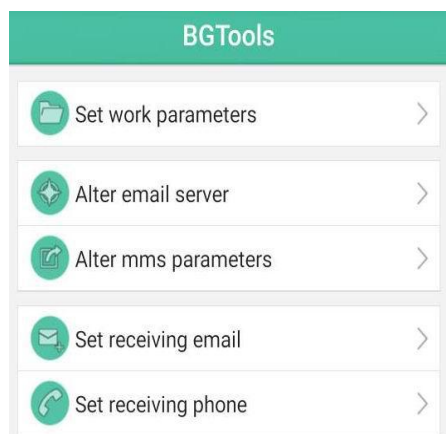

12、Select “Get Photos” means you can get a photo from you camera device. There are two ways **Cellphone**: Send MMS to phone; **Email** : Send to email by GPRS.

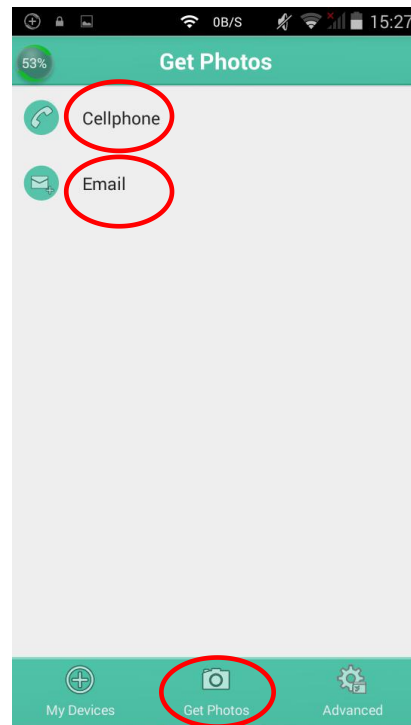

13、Select “Advanced” to set Super user information, change password, Format SD card, System Checking, Arming, Disarming. View the Version.

Set password: Super user can re-set password if you forget or want change it.

Super User Password: Use your password to change your super user.

